5344

BCS-042

BACHELOR OF COMPUTER APPLICATIONS (BCA) (Revised)

Term-End Examination, 2019

BCS-042 : INTRODUCTION TO ALGORITHM DESIGN

Time : 2 Hours   **Maximum Marks : 50**

Note : Question no. 1 is **compulsory**. Answer **any three** questions from the rest.

1. (a) Let $f(n)$ and $g(n)$ are two positive functions, using basic definition of Big Oh ("O") and Theta (θ), prove/disprove the following : [5]

    (i) $\max\{f(n), g(n)\} = \theta(f(n) + g(n))$
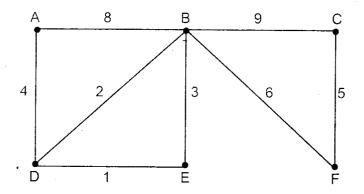
    (ii) $2^n = O(2^{n+1})$

   (b) Solve the following Recurrence using Recursion tree method : [5]

    $T(n) = 2T(n-1) + 1$

    Find tight solution of the Recurrence.

(c) Explain general algorithm to solve any problem using Greedy techniques. Write any two characteristics of Greedy Algorithm. [5]

(d) Write Algorithm to solve Knapsack (fractional) problem using Greedy Method. Find the running time of the algorithm also. [5]

2. (a) Define minimum spanning tree. Apply Kruskal's Algorithm to find minimum cost spanning tree for the following graph : [6]

(b) Write bubble sort algorithm and find its time complexity in worst case. [4]
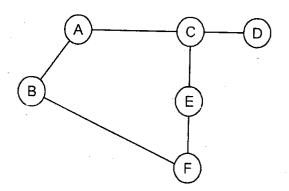
3. (a) For the following graph write DFS (sequence of traversal) from the node A : [4]

(b) Apply master method to solve the following recurrence relation : [6]
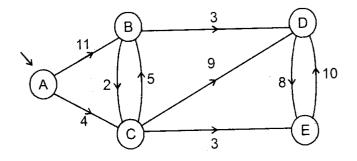
(i) $T(n) = 2T\left(\dfrac{n}{2}\right) + n$

(ii) $T(n) = 3T\left(\dfrac{n}{4}\right) + n\log n$

4. Explain Dijkstra's Algorithm to find a single source shortest path in a given graph. Apply Dijkstra's Algorithm and find the shortest path from source vertex 'A' to rest of the vertices : [10]

5. Differentiate between the following with respect to method of solving a problem and time complexity :   [10]

    (a)   Depth-First-Search (DFS) Vs. Breath-First-Search (BFS)

    (b)   Bellman-Ford Algorithm Vs Dijkstra's Algorithm for single source shortest path.

----- X -----